


Mosaic™ USB charger Type-A + Type-C

Cat. No(s): 0 775 70L - 0 792 93L - 0791 93L




1. USE

Charger with side connection via bistable automatic terminals.
 For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks
 Supplied without a cord.

2. RANGE

5.0 V $\overline{=}$ - 3.0 A USB charger	White	Alu	Matt Black
1 Mosaic Link USB Type-A + 1 Mosaic Link USB Type-C (1 Type-A output - 1 Type-C output) Can be combined with other Mosaic Link socket outlets using connection accessory Cat. No. 0 771 00L.	0 775 70L	0 792 93L	0 791 93L

3. DIMENSIONS (mm)

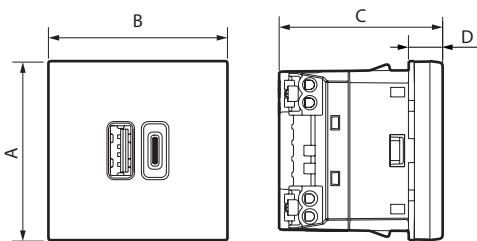

A	B	C	D
45	45	41	8.5

4. CONNECTION

Type of terminals: automatic with side connection
 Number of terminals: 2 inputs - 2 outputs
 Terminal capacity: 2 x 2.5 mm²
 Stripping length: 12 mm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics

Impact tests: IK 04
 Penetration by solid bodies/liquid: IP 40

■ 5.2 Material characteristics

Base: PC
 Cover-plate: ABS
 White RAL 9003
 Painted glittery varnished aluminium
 Painted satin-finish matt black RAL 9017

Halogen-free
 UV-resistant

Self-extinguishing:
 850°C/30 s for insulating components holding live parts in place.
 650°C/30 s for other insulating components.

■ 5.3 Climate characteristics

Storage temperature: - 20°C to + 70°C
 Usage temperature: + 5°C to + 45°C

■ 5.4 Electrical characteristics

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100-240 V~
Nominal input frequency	50/60 Hz
Power	15.0 W
Maximum input current	0.5 A
Maximum power consumption in standby	0.075 W
Power average efficiency	80.3%
Nominal output voltage	5.0 V $\overline{=}$
Maximum output current Type-A + Type-C	3.0 A shared over outputs A and C
No-load power consumption class and average efficiency level:	Level VI*
Protection class	II - Low voltage

*NB: EU/2019/1782 October 2019, Directive 2009/125/EC on eco-design requirements for AC/DC power supplies.

Note: To optimize the charging time of your device, make sure it is turned off during the charging phase.

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichlorethylene.

Caution: Always test before using other special cleaning products.

7. ACCESSORIES

0 771 00L: Mosaic Link connection accessory, used to link 2 Mosaic Link socket outlets or 2 socket blocks quickly and easily.

8. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
Refer to e-catalogue.