

1 **Scope of delivery:** J80026A0000




2 **Scope of delivery:** J80026A0001





order separately

- H86011A0001 grey
- H86011A0002 orange
- H86011A0003 blue
- H86011A0004 yellow
- H86011A0005 green
- H86011A0006 black
- H86011A0000 white

3


Stripping length

min. 40 mm  
min. 1.6 in.

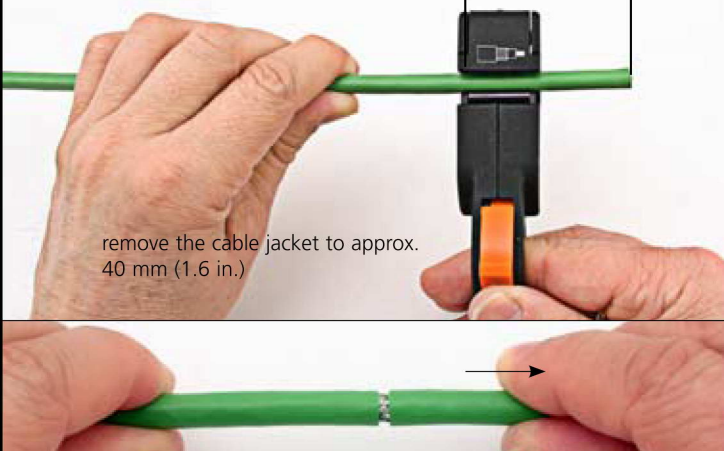


remove the cable jacket to approx. 40 mm (1.6 in.)

4a **SF/UTP** side braided shield over the cable jacket

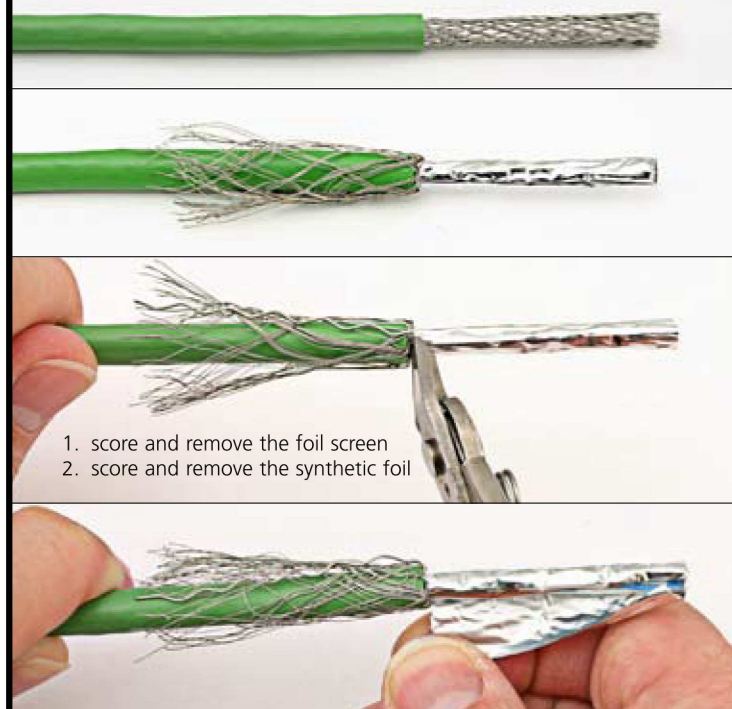

1. score and remove the foil screen
2. score and remove the synthetic foil

4b **SF/UTP** Drag chain cable

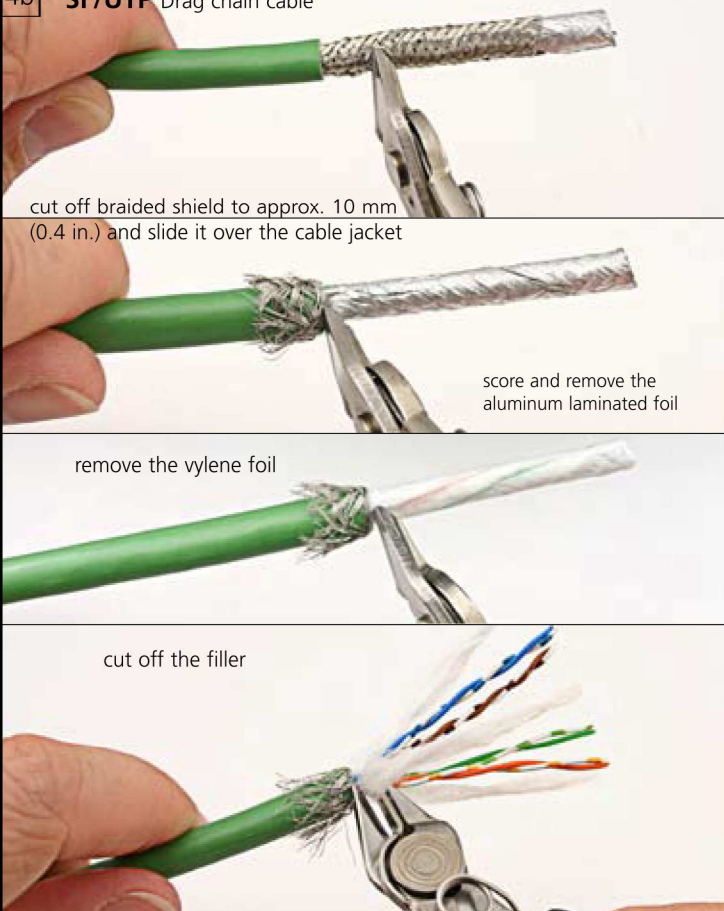


cut off braided shield to approx. 10 mm (0.4 in.) and slide it over the cable jacket

score and remove the aluminum laminated foil

remove the vylene foil

cut off the filler

4c **S/FTP** slide braided shield over cable jacket

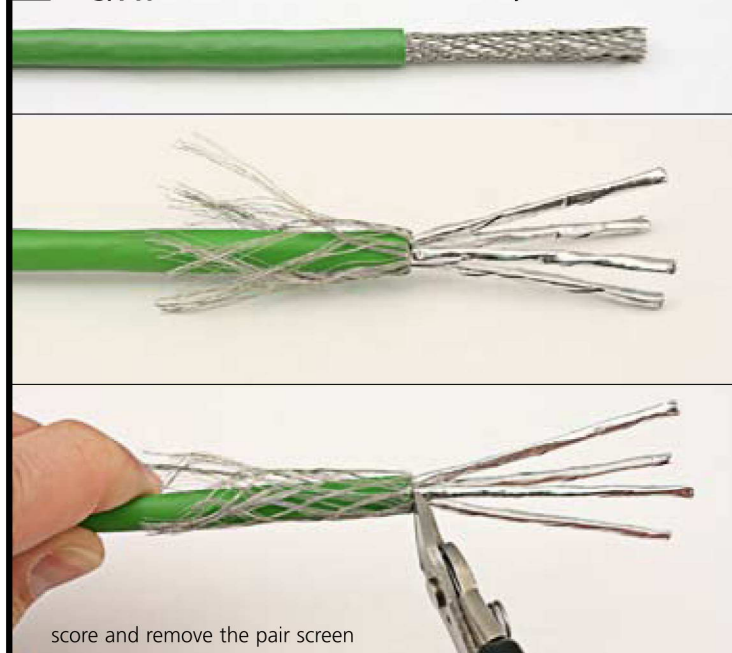

score and remove the pair screen

PIN assignments				
RJ45 PIN No.	Colour code <b>T568</b>		DIN 47100	Industrial
	A	B		
1	WH-GN	WH-OG	WH	YE
2	GN	OG	BN	OG
3	WH-OG	WH-GN	GN	WH
4	BU	BU	YE	-
5	WH-BU	WH-BU	GY	-
6	OG	GN	PK	BU
7	WH-BN	WH-BN	BU	-
8	BN	BN	RD	-

Connection	
1:1	1GBT crossover
1-1	1-3
2-2	2-6
3-3	3-1
4-4	4-7
5-5	5-8
6-6	6-2
7-7	7-4
8-8	8-5

Application							
RJ45 PIN No.	10BT/100BT	Gigabit Ethernet	Token Ring ISDN/So	TP-PMD/ATM	ISDN/So	Upo/TEL	
1	•	•					
2	•	•		•			
3	•	•	•		2a		
4		•	•		1a	•	
5		•	•		1b	•	
6	•	•	•		2b		
7		•		•			
8		•		•			

