

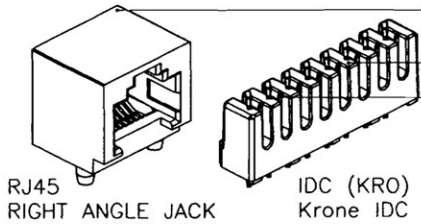


SCALE 1/4

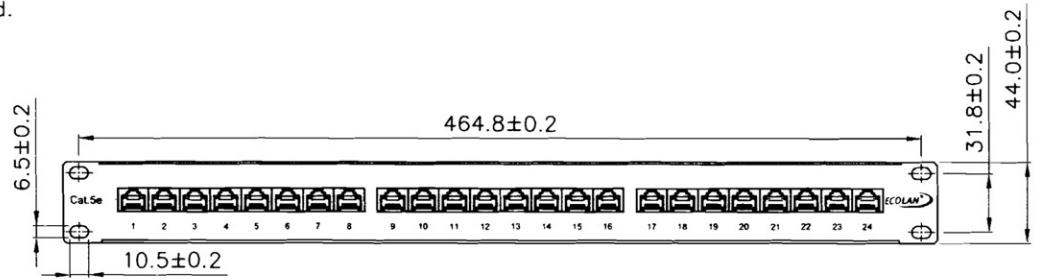

RJ45 RIGHT ANGLE JACK
IDC (KRO) Krone IDC

SCALE 1/1

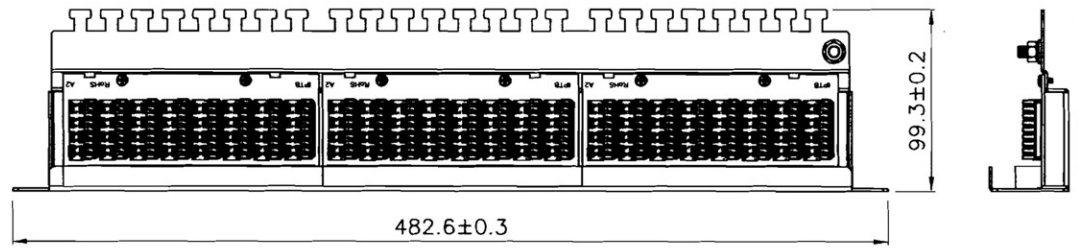

Specification :

Material :

1. Base Case : SPCC, 1.5 mm thickness with Black color painted.
2. RJ45 Jack Housing : PBT+15%GF, UL 94V-0.
3. RJ45 Jack Contact material & finished :
 - 3-1. Phosphor Bronze, Round Pin.
 - 3-2. Min. 50 micro-inch Gold plating over 50-60 micro-inch Nickel plated.
4. IDC Housing : PC+5%GF, UL 94V-2.
5. IDC Terminal material & finished :
 - 5-1. Phosphor Bronze with 50-60 micro-inch Tin plated.
 - 5-2. Krone tool only.
 - 5-3. Suitable for 22-26 AWG stranded and solid wire.

Performance :

- a. The sticker color codes combine two wirings of T568A & T568B.
- b. Insertion Force : 900 gms for 8 contacts.
- c. Retention Strength : 7.7 kgs between Jack and Plug.
- d. Operation Temperature : -40°C to 80°C.
- e. Durability :
 - e-1. Jack : 750 cycles Plug-Jack mating and unmating test, insertion cycles at 20 cycles/minute max. Contact resistance test per 100 cycles.
 - e-2. IDC : Max. 200 punching times.
- f. The Cat.5e performance is in compliance with the ANSI/TIA/EIA 568 B.2 standard.

		TITLE: ECOLAN 24 Port Cat.5e UTP Panel, BK			
		DATE: JUL-06-2007	DESIGNED:		
		DRAW NO.: 11324123	APPROVED:		
		SCALE: 1/4	SHEET: 1/1		
UNIT: mm		REV: 1-0			
		TOLERANCE: ±0.20			

